

AM™ Sensor Line

Antimicrobial Technology at Work

VersaPad® Data Sheet

Touchpad for Mousing Applications

Features and Benefits

- Unique hard coated film with antimicrobial protection
- Enumerates as a standard three-button
- HID-compliant mouse
- Requires no additional driver
- Tap for left-click
- Double tap
- Tap and drag
- Drag edge lock
- Border scroll
- Actuator can be a stylus, a finger, or a gloved hand

Applications

- Health care
- Food industry
- Pharmaceutical
- Mass & Home Improvement
- Consumer Electronics
- Domestic
- Infant & baby

Description

The Interlink VersaPad® touchpad is Interlink's mousing solution for OEM and rugged applications. The module's tough moisture resistant surface can be used with a finger, stylus, or glove; even in harsh environments.


The VersaPad® enumerates as HID mouse with Left and Right Click capabilities using the native Operating System's mouse drivers. A Hardware Development Kit is available. Call us to order at 805-484-8855.

The **AM** Sensor Line from Interlink Electronics provides constant and dependable antimicrobial product protection and an added level of defense against damaging microbes for the useful lifetime of the products. The touchable surfaces of the **AM** Sensor Line inhibit the growth of microbes on contact, working continuously to maintain a consistently lower bio-burden than would be expected on a product without antimicrobial protection.

The **AM** Sensor Line gives any application a competitive advantage in a world that focuses on cleanliness. Interlink's **AM** Sensor Line is designed for next generation applications in which preventing the growth of bacteria, mold and mildew is a priority. Antimicrobial protection is not a substitute for proper cleaning practices and does not protect users from disease carrying organisms.



FFC Version

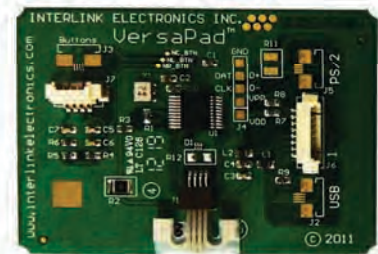

Header Version (board to wire)



P/N: 94-00053 Rev. A

Your Sensor Application with a Competitive Edge

Touchpad for Mousing Applications

Device Characteristics


Overlay Color	Dark Gray, Pantone 425C
Actuation Force	.05N-.3N (5g – 30g)
Weight	15 grams or less
Operating Temperature Performance	Functional before, during, and after exposure to the below conditions: Cold Dry -20°C <=5%RH for 96 hours Cold Humid 10°C 95%RH for 96 hours Hot Dry 50°C <5%RH for 96 hours Hot Humid 60°C 95% for 96 hours
Storage Temperature Performance	Functional after 96 hours of exposure to the below conditions: Cold Dry -40°C <-5%RH Hot Dry 70°C <=5%RH Hot Humid 70°C 95%RH
Thermal Shock	Functional after 20 cycles of -40°C to 70°C with a 30 minute dwell time and 5 minute transitions
Lifetime Durability	>5 million stylus strokes at -150g+/-10g
Standing Load Durability	Vertical static load 1kgf max for 1 hour
Tap Durability	>1,000,000 cycles at 1kgf/silicone finger/4Hz
Drop	Dropped from 122cm (48 in.) onto concrete
Mechanical Shock	Comparable to MIL-STD-202, 80G accelerated in 11 msec
Mechanical Vibration	Comparable to MIL-STD-202, Method 204, Condition A
Altitude – Operating 10,000 ft	Functional before, during, and after exposure to altitude pressure simulation in vacuum (1 hour)
Altitude – Storage 30,000 ft	Functional before, and after exposure to altitude pressure simulation in vacuum (1 hour)
UL	All materials UL grade 94 V-1 or better
RoHS	Compliant
Stylus recommendations:	
Material	Acetal or Teflon
Minimum radius of tip	1.5mm

Touchpad for Mousing Applications

Connector Options


Header

The J7 header (Molex #53261-0471) is used for connecting external mouse buttons, the J6 (Molex #53261-0871) is the USB/PS2 communication header.

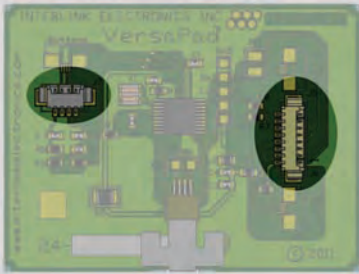


Application Information

VersaPad® Module Bezel Mounting Concept. A general bezel mounting method is one possible way to mount the VersaPad® Module

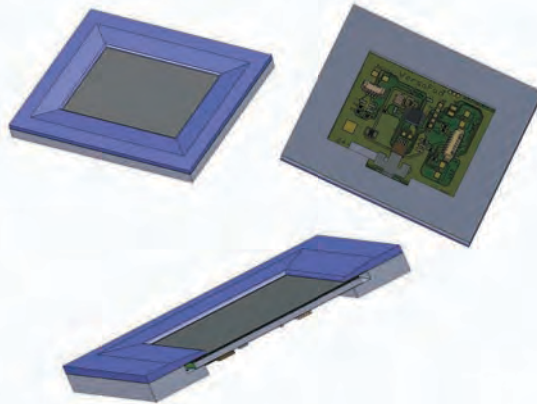

Bezel Concept Critical Dimensions

Indicated are the critical dimensions associated with the VersaPad® Module

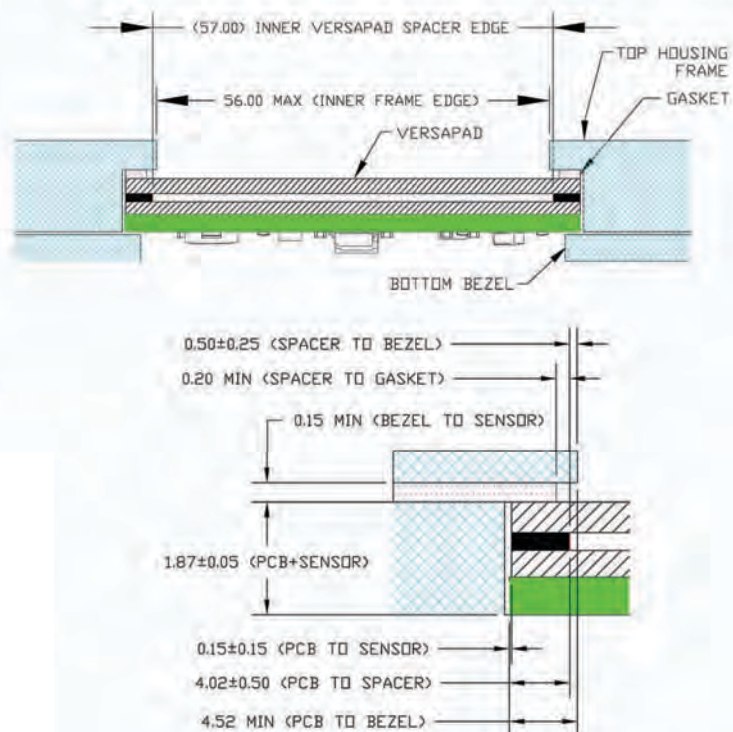

Touchpad for Mousing Applications

Orderable Part Numbers

Hardware Development Kit, 54-00077

This Hardware Development Kit includes:

- AM™ VersaPad® PS2, Connectors (Qty. 1)
- AM™ VersaPad USB, Demo Model, w/ cable (Qty. 1)
- PS2 Cable Assembly

AM™ VersaPad® PS2, 54-00072

AM™ VersaPad® USB, 54-00071


12" Wire Cable Harness, 14-16576

USB Cable Assembly, 14-00054

USB Cable Assembly with Strain Relief, 14-00108


PS2 Cable Assembly, 14-00053

PS2 Cable Assembly with Strain Relief, 14-00225

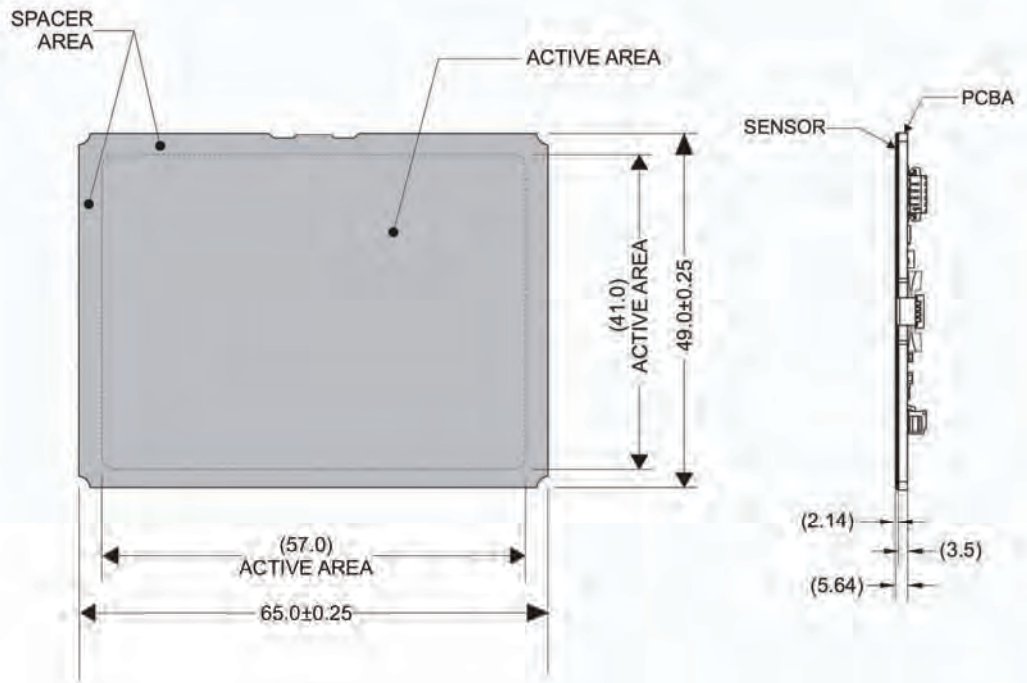

Touchpad for Mousing Applications

Interlink Electronics Inc. (OTC: LINK) is a global leader in design of Force-Sensing Resistor® (FSR®) technology and a pioneer in printed electronics. For over 28 years, our solutions have focused on handheld user input, menu navigation, cursor control, & other intuitive interface technology for the world's top electronics manufacturers. We enhance and strengthen our customer's user interface and data capture solutions with our robust array of sensor technologies and expertise. Interlink Electronics is your **trusted advisor** and technology partner in the advancing world of sensor technologies.

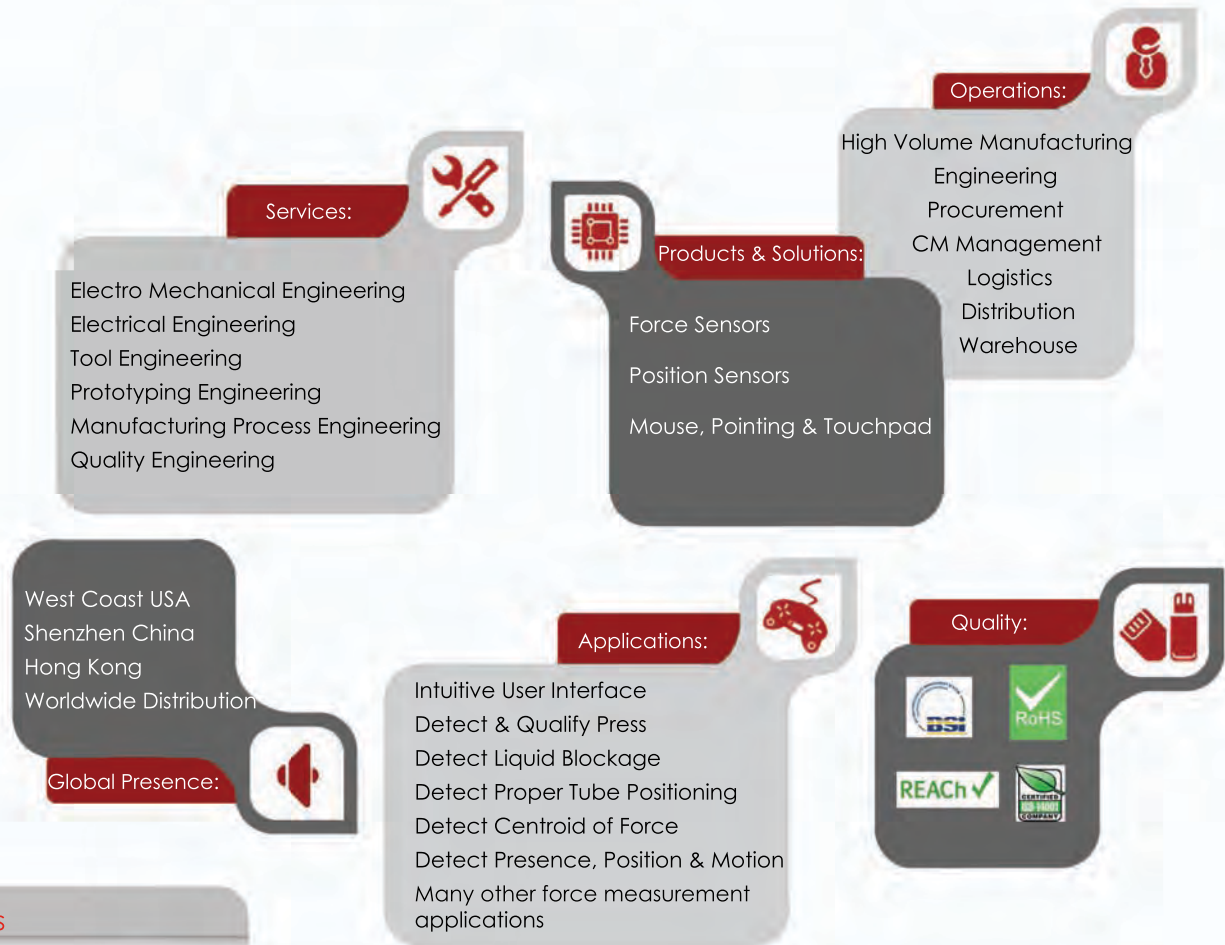

Contact Us

United States
Corporate Office
Interlink Electronics, Inc.
546 Flynn Road
Camarillo, CA 93012, USA
Phone: +1-805-484-8855
Fax: +1-805-484-9457
www.interlinkelectronics.com
Sales and Support:
sales@interlinkelectronics.com

Japan
Japan Sales Office
Phone: +81-45-263-6500
Fax: +81-45-263-6501
www.interlinkelec.co.jp

The information and recommendations contained in Interlink Electronics' literature or elsewhere concerning the antimicrobial qualities of the sensors are based on knowledge at the time of printing and are believed to be accurate. Such representations concerning the antimicrobial qualities of the sensors are based on information received from our third-party provider, are printed in good faith and they shall not bind Interlink Electronics. Interlink Electronics does not provide any warranty or guarantee related to the specifications or efficacy of the antimicrobial qualities of the sensors. To the maximum extent permitted by applicable law, in no event shall Interlink Electronics be liable for any special, incidental, punitive, indirect, or consequential damages whatsoever (including, but not limited to, damages for loss of profits, for business interruption, for personal injury, for negligence, and for any other pecuniary or other loss whatsoever) arising out of or in any way related to the antimicrobial qualities of the sensors. **Antimicrobial protection is not a substitute for proper cleaning practices and does not protect users from disease carrying organisms.** The summary of the test results provided by the material supplier is available on request. For more information please contact our sales team at: sales@interlinkelectronics.com